


## 656SR Spring break device

Images:

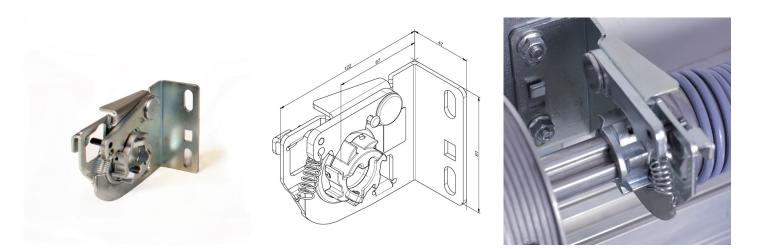

## **Description:**

- Subcategory
- IND/RES
- Full package quantity
- Unit
- Weight / Unit
- Material
- Height
- Width
- Product Family
- Inside diameter
- Max. door weight
- Max. performance
- Marking
- Commercial description
- Technical description

- : 01. RSC Residential
- : RES
- :12
- : piece (1)
- : 0,67kg
- : Galvanised Steel
- :91mm
- : 47mm
- : a 006
- : 25,4mm
- : 250kg
- : 125kg per spring
- : 656SL/R FF
- : Part of complete RSC residential system.
- : Suitable for keyed tube shafts of 1 inch. Fixation pawl-wheel by installing new screw in pre-drilled hole in shaft. Universal 51mm and 67mm springs. Easy installation by click-on to wall console 563SL/R or rear console 340S. Spring plug without bolt connection clicks into this device. Easy and fast!